

AWUS036ACS

802.11ac AC600 USB Adapter



Supported OS




Included USB Dock



Specifications

Chipset	RTL8811AU
Standard	IEEE 802.11a/b/g/n/ac
Frequency	2.412GHz-2.472GHz 5.15GHz-5.825GHz
Data-Rate	802.11b: up to 11Mbps 802.11g: upto 54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433Mbps
Antenna	1x External detachable dual-band 2.4GHz+5GHz 2dBi antenna
Antenna Connector	RP-SMA female
Channel Width	20 / 40 / 80MHz
LED Indicators	Power / WLAN
OS Support	Windows 2000, XP, Vista, 7,8, 10 macOS 10.7-10.12 Linux
Working Channel	1-14 (2.4GHz) 36-165 (5GHz)

Output Power (Typical)	18dBi
Sensitivity	802.11b:-85dBm@11Mbps 802.11g: -69dBm@54Mbps 802.11n: -68dBm@150Mbps 802.11ac: -59dBm@433Mbps
Security	64/128bit WEP WPA (TKIP with IEEE 802.1x) WPA2 (AES with IEEE 802.1x) WPA Mixed
Operating Temperature	-10°C ~ 60°C
Storage Humidity	5% ~ 98% (Non-condensing)
Dimension	5.5 x 1.0 x 2.5 cm (L x H x W)
colorbox weight	80g

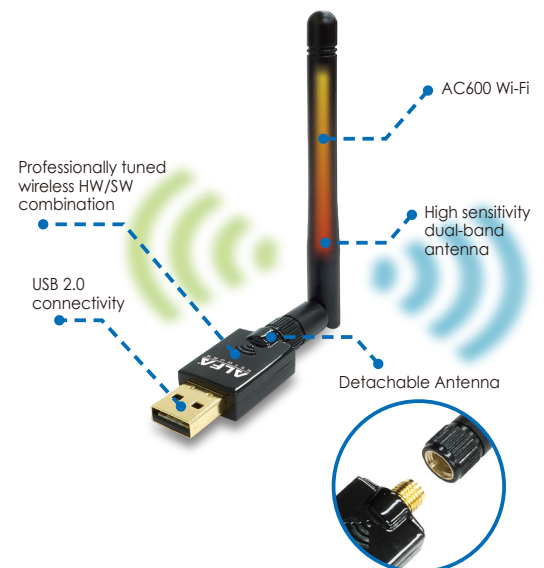

ALFA Network Inc.

4F-1, No. 106, Rueiguang Rd., Neihu District, Taipei City 114, Taiwan
TEL : 886-2-27968477 FAX : 886-2-27968478
Contact us : sales@alfa.com.tw



www.alfa.com.tw